



# 16 Cell Battery Watering System




BATCRT-INJ-S16

## Specifications

- Input/Operating Pressure: 25 to 35 psi (1.7 to 2.4 bar)
- Acceptable Filling Temperature: 35° to 160°F (2° to 71°C)
- Valve Body Material: Polypropylene
- Max Valve Height above Vent: 1.10 in (2.79 cm)
- Flow Rate: 8 to 10 gpm (30 to 38 lpm) per string
- System Exposure Temperature: -20° to 160°F (-29° to 71°C)
- Tubing Material: Proprietary flexible PVC
- Fitting Type (Compatible with Vent Opening Types): US 1/4 Turn & DIN
- Maximum number of valves per input coupling: 24
- Input Hose Size: 1/2 in (1.3 cm)
- Weight: 1.4 lb (0.64 kg)

## Recommended Products

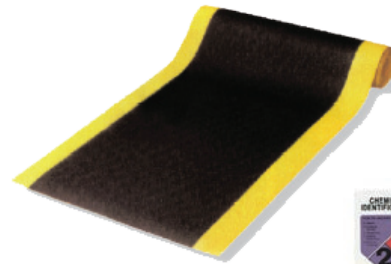

Battery Room Aisle Mat



Compliance Package



Protecting Mission-Critical Facilities Since 1993.™

5534 Olive Street, Montclair, CA 91763 • 800.206.9884 Fax 909.624.1772 • [www.EnviroGuard.com](http://www.EnviroGuard.com)  
EnviroGuard is an ISO 9001-2008 Certified Manufacturer of UL Listed and UL Recognized products

