



Hydrogen Gas Monitor

Standard



Part Number: HYD-S

Features

- Low maintenance
- Sensor on the end of 30-foot extension
- Long-life metal oxide sensor
- Enclosure to remove by 4 screws
- AC Power cord provided
- Optional Calibration Kit available
- Also available in a 48V model

Part Number

- HYD-S
- HYD-S48 (48 VDC)


Regulations In Compliance With

- CSA/NRTL Certified

Specifications

- 115 VAC 24 VDC, or 48 VDC
- Indoor enclosure
- Dimensions: 6.85" w x 6.48" h x 3.30" d
- Weight: 5 lbs.
- Wall mounted
- Operating Temp: 35-120°F
- Relay Ratings: 12 Amps, form C contacts
- Calibration required every 3 months

Recommended Products

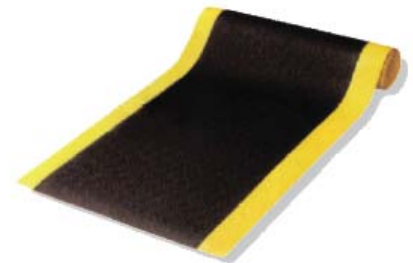

Battery Room Aisle Mat



Compliance Package



Protecting Mission-Critical Facilities Since 1993.™

5534 Olive Street, Montclair, CA 91763 • 800.206.9884 Fax 909.624.1772 • www.EnviroGuard.com
EnviroGuard is an ISO 9001-2008 Certified Manufacturer of UL Listed and UL Recognized products

